

10/532127

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

**(19) World Intellectual Property
Organization
International Bureau**



(43) International Publication Date
1 July 2004 (01.07.2004)

PCT

(10) International Publication Number
WO 2004/055950 A1

**(51) International Patent Classification⁷: H01R 15/523,
H02G 15/013**

(NO). **FRET**LAND, Lars [NO/NO]; Svartåsvn. 7, N-3615 Kongsberg (NO). **KASIN**, Torstein [NO/NO]; Olavsgt. 7, N-3612 Kongsberg (NO).

(21) International Application Number: PCT/NO2003/000337

(74) Agents: **ONSAGERS AS** et al.; P.O.Box 6963 St. Olavs plass, N-0130 Oslo (NO).

(22) International Filing Date: 8 October 2003 (08.10.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2002 5163 25 October 2002 (25.10.2002) NO

(71) Applicant (for all designated States except US): FMC KONGSBERG SUBSEA AS [NO/NO]; P.O. Box 1012, N-3601 Kongsberg (NO).

(81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(72) Inventors; and

(75) **Inventors/Applicants (for US only): JOHANSEN, John, A. [NO/NO]; Gamle Gomsruds vei 56a, N-3612 Kongsberg**

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: FEEDTHROUGH OF AN ELECTRICAL CONDUCTOR

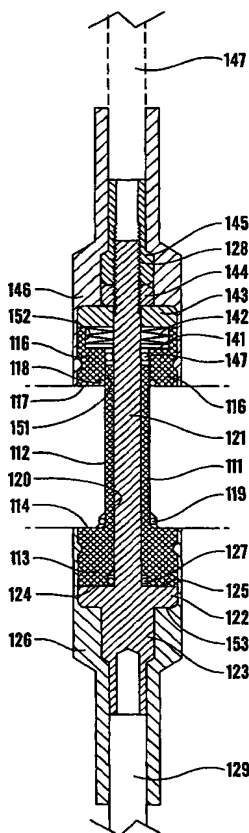

(57) Abstract: A device for feedthrough of an electrical conductor from one area to another area, where the two areas are preferably at different pressures. The device comprises a base plate/dividing plate (10) through which at least one penetrator (101-105) is passed. The device is characterised in that the at least one penetrator comprises a bore (120) for receiving a conductor (121, 122, 123), for example a copper conductor. The device further comprises a first part (111) with a first shoulder surface (114), and a second part (116) with a second shoulder surface (117) which are intended to abut against each side of the plate (10). The device further comprises at least one spring device which is arranged to keep the shoulder surfaces (114, 117) clamped against the base plate (10).

WO 2004/055950 A1



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

— before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*